


## Safety & Security Film

100-Micron – Clear Exterior

**Code:** SA-100CL-eSR

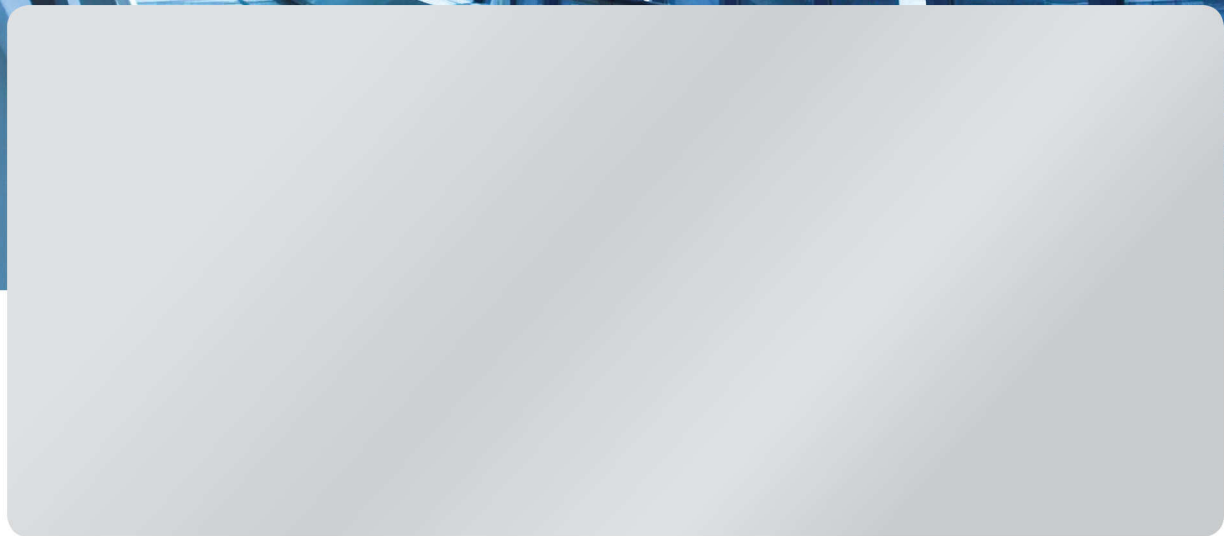

### Performance Data

#### Total Solar Energy

Transmitted	74%
Reflected	10%
Absorbed	16%

#### Visible Light

Transmitted	84%
Reflected	10%
Ultra-Violet Rejected	99%
Glare Reduction	n/a
Shading Coefficient	0.93
Total Solar Energy Rejected	19%

### Physical Properties

Description	Clear
Film Thickness	100-Microns (4-thou)
Structure	Single-ply Laminate
Tensile Strength	25,000 PSI
Break Strength	100 Pounds per Inch (width)
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	5 to 6 Pounds per Inch
Warranty	5 Years*

#### Specification:

The safety & security film is to be **Opalux SA-100CL-eSR**, as manufactured by Opalux® ([www.opalux.co.uk](http://www.opalux.co.uk)). The window film is to be installed to the **exterior** side of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure. \*Exterior grade films must be correctly edge sealed.

#### Notes:

Test results are produced from film applied to clear glass. Performance data is subject to change without prior notice. Accurate selection of window film requires specialist knowledge, and it is recommended that specifiers contact the company at the specification stage. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct or consequential loss howsoever arising.